

STANDARD CONSTRUCTION

CONSTRUCTION

- ALL WELDED

FRAME

- 5.00in x .081in [127mm x 2.1mm] EXTRUDED ALUMINUM (6063-T5) CHANNEL FRAME

BLADES

- INVERTED V-TYPE RAIN-RESISTANT BLADES, .081in[2.1mm] EXTRUDED ALUMINUM (6063-T5) 35° BLADE ANGLE, 2.00in[51mm] BLADE SPACING

FINISH

- MILL

MINIMUM SECTION SIZE

- 8.00in W x 14.00in H [203mm x 356mm]

MAXIMUM SECTION SIZE

- ONE PIECE CONSTRUCTION 72in W x 72in H [1829mm x 1829mm]
- LARGER LOUVERS WILL REQUIRE FIELD ASSEMBLY OF MULTIPLE SECTIONS BY OTHERS
- LARGER LOUVERS MAY REQUIRE STRUCTURAL SUPPORT BY OTHERS
- MAXIMUM SECTION SIZE MAY VARY FOR ANODIZED FINISH



AVAILABLE OPTIONS

- FLANGED FRAME

FINISHES



- PRIME COAT
- DURACRON (BAKED ENAMEL) [1]
- DURANAR (70% PVDF) [1]
- DURANAR XL (70% PVDF WITH CLEAR TOP COAT) [1]
- CLEAR ANODIZED
- COLOUR ANODIZED [1]

ACCESSORIES

- BIRD SCREEN
- INSECT SCREEN
- EXTENDED SILL (LOOSE)
- BLANK-OFF PANELS (INSULATED OR NON-INSULATED)

[1] REFER TO PRICE COLOUR GUIDES FOR A LIST OF AVAILABLE STANDARD COLOURS: [PAINT](#) & [ANODIZED](#)
CONSULT PRICE LOUVERS DEPT. FOR OTHER SPECIAL REQUIREMENTS

CHANNEL FRAME "A" MOUNTING SHOWN
FOR OTHER MOUNTING METHODS SEE 274240

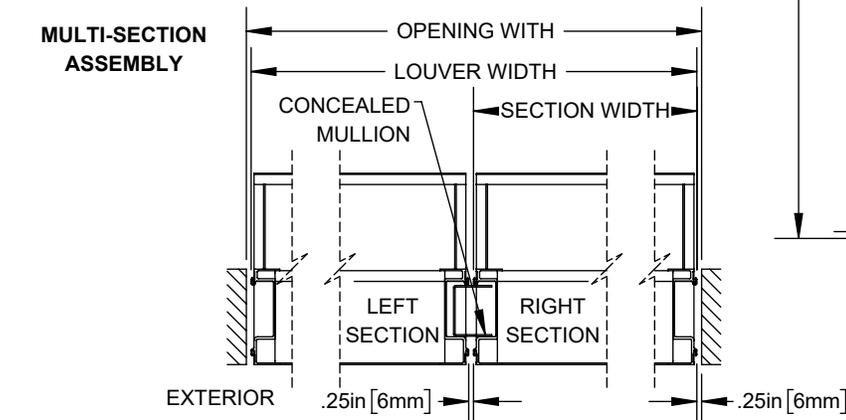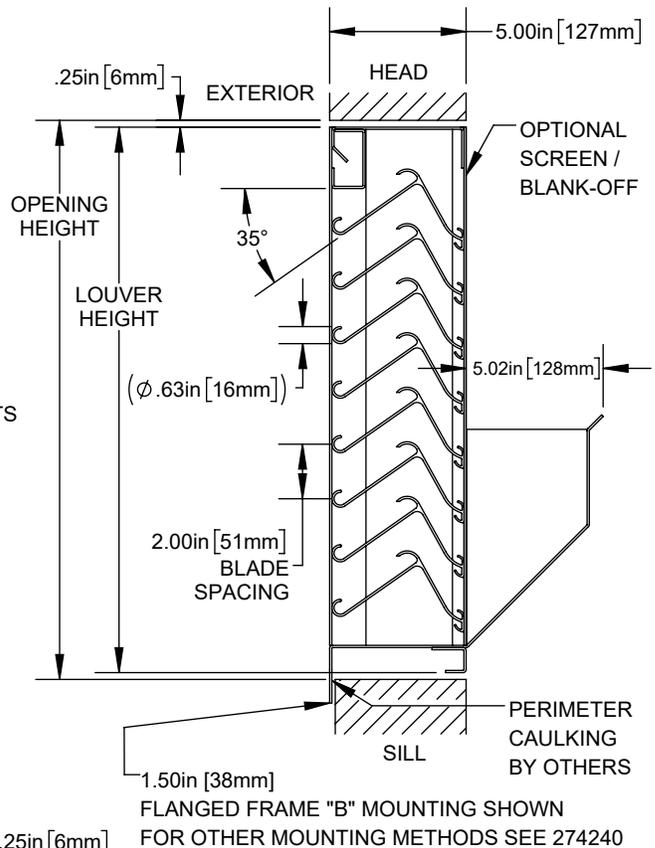

PROJECT:		PRICE [®]	
ENGINEER:			
CUSTOMER:		236888	RSE5 5" (127) DEEP, 35° BLADE EXTRUDED DRAINABLE LOUVER
SUBMITTAL DATE:	SPEC. SYMBOL:	04/15/2022	