

STANDARD CONSTRUCTION

CONSTRUCTION

- ALL WELDED

FRAME

- 4.00in x .081in [102mm x 2.1mm] EXTRUDED ALUMINUM (6063-T5) CHANNEL FRAME

BLADES

- Z STYLE BLADES, .081in[2.1mm] EXTRUDED ALUMINUM (6063-T5) 39° BLADE ANGLE, 4.00in[102mm] BLADE SPACING

FINISH

- MILL

MINIMUM SECTION SIZE

- 9.00in W x 9.50in H [229mm x 241mm]

MAXIMUM SECTION SIZE

- ONE PIECE CONSTRUCTION 72in W x 120in H [1829mm x 3048mm] OR 120in W x 72in H [3048mm x 1829mm]
- LARGER LOUVERS WILL REQUIRE FIELD ASSEMBLY OF MULTIPLE SECTIONS BY OTHERS
- LARGER LOUVERS MAY REQUIRE STRUCTURAL SUPPORT BY OTHERS
- MAXIMUM SECTION SIZE MAY VARY FOR ANODIZED FINISH

AVAILABLE OPTIONS

- FLANGED FRAME


FINISHES

- PRIME COAT
- DURACRON (BAKED ENAMEL) [1]
- DURANAR (70% PVDF) [1]
- DURANAR XL (70% PVDF WITH CLEAR TOP COAT) [1]
- CLEAR ANODIZED
- COLOUR ANODIZED [1]

ACCESSORIES

- BIRD SCREEN
- INSECT SCREEN
- EXTENDED SILL (LOOSE)
- BLANK-OFF PANELS (INSULATED OR NON-INSULATED)

[1] REFER TO PRICE COLOUR GUIDES FOR A LIST OF AVAILABLE STANDARD COLOURS: [PAINT](#) & [ANODIZED](#)
CONSULT PRICE LOUVERS DEPT. FOR OTHER SPECIAL REQUIREMENTS

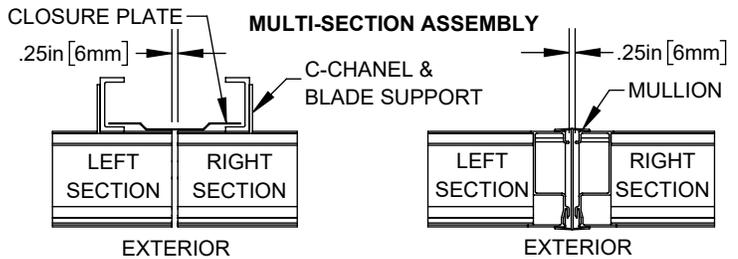

- CB: CONTINUOUS BLADE (CONCEALED MULLIONS OPTION)


- VISIBLE VERTICAL MULLIONS (STANDARD)



Price Industries certifies that the ZE439 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Seal applies to air performance ratings.



CHANNEL FRAME "A" MOUNTING SHOWN
FOR OTHER MOUNTING METHODS SEE 274240

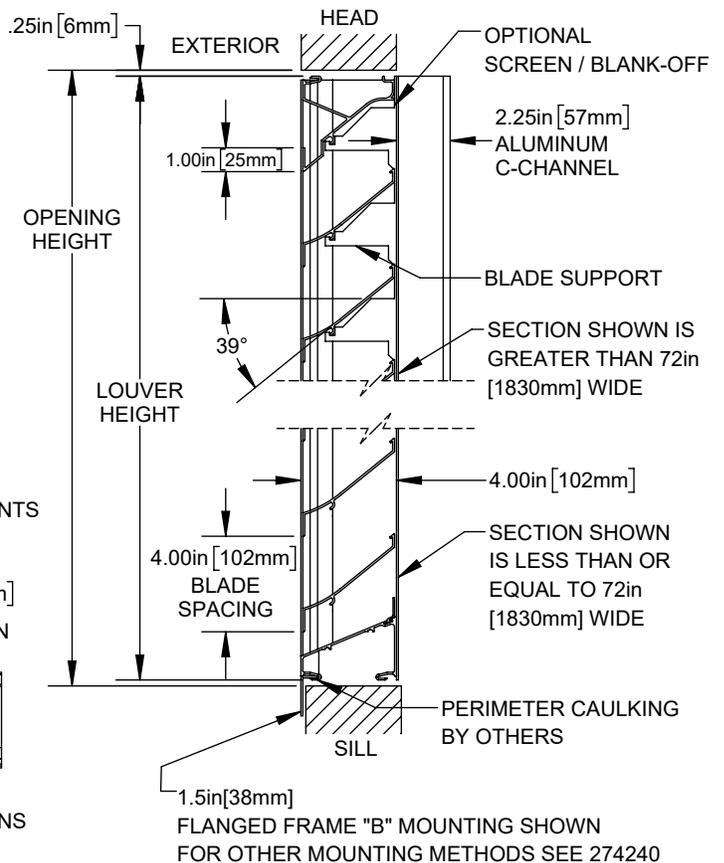

PROJECT:		PRICE [®]	
ENGINEER:			
CUSTOMER:		237945	
SUBMITTAL DATE:	SPEC. SYMBOL:	04/08/2022	