


## Damper Enclosures

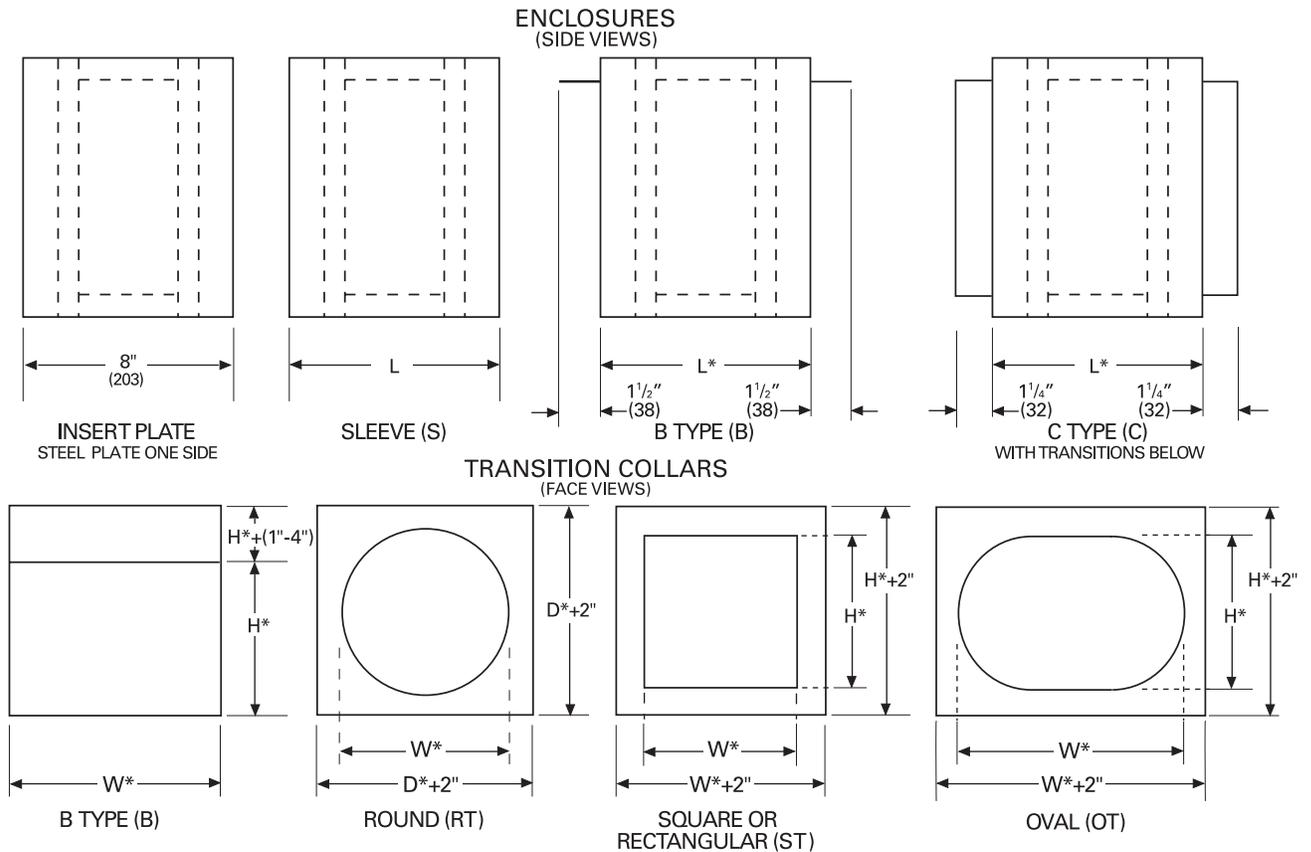

<b>MINIMUM SLEEVE / ENCLOSURE LENGTH</b>	
<b>PRODUCT</b>	<b>MINIMUM LENGTH</b>
FSD-3V c/w DLT or DLT-1 OR OVERRIDE RELEASE	16"
FSD-AF c/w DLT OR DLT-1 OR OVERRIDE RELEASE	16"

NOTE: B TYPE TRANSITIONS MAY BE FURNISHED ON DAMPERS LESS THAN 8" IN HEIGHT. TRANSITION USED TO REDUCE MINIMUM DAMPER/SLEEVE HEIGHT OF 8" TO 7", 6", 5" OR 4". (MINIMUM DUCT HEIGHT).

**Standard Construction:**

**Sleeve:** 20 ga. Galvanized Steel.

**Enclosure:** 18 ga. Galvanized Steel.

**Transition Collars:** 22 ga. Galv. Steel.

\*D = DIAMETER

\*W = WIDTH (DUCT)

\*H = HEIGHT (DUCT)

\*L = LENGTH (SEE CHART)

DAMPER FRAME SHOWN AS DASHED LINES